

Self contained luminaire

Busalla wall mounted luminaire

Product Description

This stylish circular luminaire can be ceiling, wall mounted or semi-recessed (with optional semi recess kit) and has an opal impact resistant polycarbonate diffuser which reduces glare and provides an even visual level of illumination.

High efficiency 2D compact fluorescent lamps are incorporated for reduced energy consumption and combined with high frequency control gear there is flicker free operation, instant start and an extended lamp life. Emergency versions are also available.

Product Features

- Energy efficient high frequency control gear as standard
- Easy lamp replacement and maintenance
- Opal impact resistant polycarbonate diffuser & spun metal gallery
- High quality sub components used for an extended service life.
- Mains emergency versions available
- Optional semi-regress kit available

Applications


- Schools
- Libraries
- Reception areas
- Leisure Centres







Dimensions

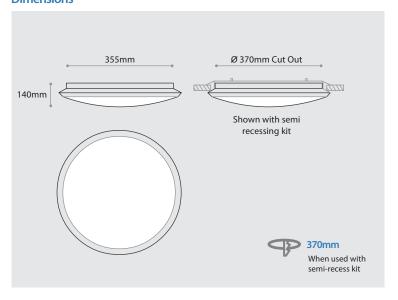

Finishes

WH - White CH - Chrome BR - Brass

Accessory

EBUS252/RK - Semi-recess kit

Control Gear Options

HFDD - High frequency digital dimming

HFAD - High frequency analogue dimming (1-10 volt control)

Emergency Options

AT - Auto test function **CT** - Central test function **CB** - Central battery slave unit

Order Codes

Order Code	Wattage	Lamp Type	Control Gear	Weight
EKBU335/28/*	1 x 28	2D Compact Fluorescent	High Frequency	2.6 kgs
EKBU335/28/M3/*	1 x 28	2D Compact Fluorescent	High Frequency with a three hour maintained emergency function	3.4 kgs
EKBU335/38/*	1 x 38	2D Compact Fluorescent	High Frequency	2.6 kgs
EKBU335/38/M3/*	1 x 38	2D Compact Fluorescent	High Frequency with a three hour maintained emergency function	3.4 kgs

^{*} Add suffix for option and finish

EG. EKBU335/28/M3/BR/CT 1x28 Watt 2D Busalla surface luminaire with a maintained emergency option with a brass gallery and a central test function.

